

define<sup>®</sup>

Decorative Flat Plate  
Electrical Accessories





**define**<sup>®</sup>

Decorative Flat Plate Electrical Accessories in Various Plate Finishes

## Define<sup>®</sup> unique product codes

When ordering any Define<sup>®</sup> products, please specify the required finish by following the simple code structure as demonstrated here.

<b>FP</b>	<b>BN</b>	<b>411</b>	<b>BK</b>
Plate Style	Product Finish	Product Number	Insert Colour

## Contents

Switches	<b>d5</b>	Conventional plate accessory design with a standard 6mm return on the plate depth, limits the design opportunities in many installations by virtue of the fact that the plate becomes the feature instead of complementing the features of the decoration in a room.
Power Socket Outlets	<b>d11</b>	
13A Fused Connection Units	<b>d13</b>	
Control Switches	<b>d16</b>	The Define <sup>®</sup> flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes. Define <sup>®</sup> plates are coated stainless steel.
Socket & Blank Plates	<b>d17</b>	
Telephone & Data Sockets	<b>d20</b>	
TV & Satellite	<b>d21</b>	The comprehensive range of products includes plate switches of different construction, including traditional 'dolly' style, contemporary self coloured Ingot switches and, of course, rotary dimmer switches. The modular construction of the standard moulded Click <sup>®</sup> range of switches has been incorporated into the Define <sup>®</sup> range. When used in conjunction with the Minigridd <sup>™</sup> range of blank mounting plates, customised switching solutions can easily be created with a wide selection of module options.
New Media <sup>™</sup> Plates	<b>d22</b>	
Galvanised Boxes	<b>d23</b>	
Dry Lining Boxes	<b>d24</b>	

Amongst the socket range can be found standard switched 13A sockets plus 2A and 5A round pin sockets for dedicated lighting circuits etc..

Different configurations of fused connection units and control switches, together with 45A switches and assorted data and media accessories all contribute to an exciting and aesthetically pleasing wiring solution offered by the high quality Define<sup>®</sup> product group.

All Define<sup>®</sup> products are available with black or white inserts, excluding black nickel finishes which are supplied with black insert.

Every Define<sup>®</sup> product featured in the pages of this brochure is available in 5 distinctive quality finishes: Polished Chrome, Stainless Steel, Brushed Stainless\*, Pearl Nickel and Black Nickel. \*UK Design Registration 3015621






# Switches

Modular Switches – the standard switch modules used in the Define® product are self coloured Ingot style switches which feature single screw fixing to the face plate.

Design flexibility is enhanced by availability of multi-function and fully interchangeable modules from the Minigrid™ range.

These non-furnished 1 & 2 gang plates offer the installer unprecedented flexibility in creating customised switch arrangements. A simple single screw fixing secures the required modules in position. A host of switching options can be achieved by selecting from our range of interchangeable modules.



All Define® switch plates are modular as standard, allowing you create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches  
Dimmer Switches | Toggle Switches



411



412



413



414



416

**MINIGRID®** For interchangeable MiniGrid™ modules - see page j18.

**Ingot Plates Switches - MiniGrid™**

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch

**Ingot Plates Switches - MiniGrid™**

- 425 10AX Ingot 1 Gang Intermediate Plate Switch


Define® plates are coated stainless steel

Standards: BS EN 60669  
Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm<sup>2</sup> / 2 x 2.5mm<sup>2</sup> / 1 x 6mm<sup>2</sup> Maximum  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



401                      402                      403

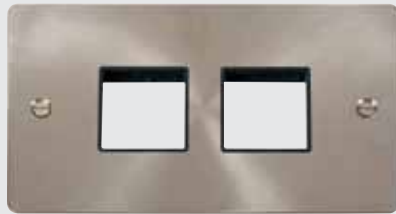

404



406                      426



140                      152



153                      154

**MINIGRID®** For MiniGrid™ modules - see page j18

**Unfurnished Plates - MiniGrid™**

- 401 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
- 402 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
- 403 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
- 404 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
- 406 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
- 426 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

**MINIGRID®** Interchangeable modules available on page j36

**Dimmer Switches**

- 140 1 Gang 2 Way 400Va Dimmer Switch
- 152 2 Gang 2 Way 400Va Dimmer Switch
- 153 3 Gang 2 Way 400Va Dimmer Switch
- 154 4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Define® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Standards: BS EN 60669, BS EN 55015 Type: Leading Edge  
 Back Box Depth: 35mm Minimum Cable Size: 2 x 1.5mm<sup>2</sup>  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



140PL



152PL



SP900



MD9014



153PL



154PL



185



186

The dimmer modules are supplied separately to the plates listed above. 140PL, 152PL, 153PL & 154PL are only available in (CH) & (BS) finishes.

**Dimmer Modules**

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

**Dimmer Mounting Unfurnished Plates**

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures
- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Maximum Wattage: 1 Gang: 1000W, 2 Gang: 1630W  
 Back Box Depth: Up to 400W: 35mm  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



421



MD9125



422



423



424

Brushed Stainless plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.

**Toggle Switches**

- 421** 10AX 1 Gang 2 Way Toggle Switch
- 422** 10AX 2 Gang 2 Way Toggle Switch
- 423** 10AX 3 Gang 2 Way Toggle Switch
- 424** 10AX 4 Gang 2 Way Toggle Switch

**10AX Intermediate Toggle Switch Modules**

- MD9125BN** Intermediate Toggle Switch Module - Black Nickel
- MD9125CH** Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN** Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other Minigridd™ modules.

Standards: BS EN 60669  
 Back Box Depth: 35mm Minimum Cable Size: 2 x 2.5mm<sup>2</sup> / 4 x 1.5mm<sup>2</sup>  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

# Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 5 different Define® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

13A Wall Socket Outlets | Wall Socket Outlets  
Round Pin | Fused Connection Units  
Fan Isolation Switches | DP Switches



535



536



1535



1536



1836

#### Ingot Switched Socket Outlets

- 535 13A Ingot 1 Gang DP Switched Socket
- 536 13A Ingot 2 Gang DP Switched Socket
- 1535 1 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536 2 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet - Twin Earth

#### Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

- 1836 2 Gang 13A DP 3 Pin Safety Shutter Outboard Switched Socket Outlet - Twin Earth

Standards: BS 1363 Cable Size: 4 x 2.5mm<sup>2</sup> / 2 x 4mm<sup>2</sup>  
Back Box Depth: 35mm Minimum  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



655



570



580



571U



038



039

**Ingot Switched Sockets With USB Outlet**

- 571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet
- 570 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)
- 580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

**Round Pin Socket Outlets**

- 038 5A Round Pin Socket
- 039 2A Round Pin Socket

**Lockable Sockets**

- 655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Standards: BS 1363 038, 039: BS 546 570, 571U, 580: BS1363-2, BS EN 62368-1, BS EN 62680-1-1 655: BS EN 60669-1, BS1363-2  
 Cable Size: 2A, 5A: 2x 2.5mm<sup>2</sup> / 3 x 1.5mm<sup>2</sup>, 13A: 4 x 2.5mm<sup>2</sup> / 2 x 4mm<sup>2</sup> 655: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
 Back Box Depth: 038, 039: 25mm Minimum, 535, 536, 570: 35mm Minimum, 571U, 655: 47mm Minimum.  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



550



551



552



553



750



751



752



753

**Ingot Fused Connection Units With Optional Flex Outlet**

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon

**Ingot Fused Connection Units Without Flex Outlet**

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)  
 Back Box Depth: 35mm Minimum Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel






200



201



202

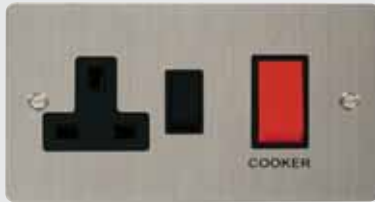

204



205



203



500



501



502



504



505



503

**45A Switches And Socket Outlets**

- 200 45A 1 Gang DP Switch
- 201 45A 1 Gang DP Switch With Neon
- 202 45A 2 Gang DP Switch
- 203 45A 2 Gang DP Switch With Neon
- 204 45A 2 Gang DP Switch With 13A DP Switched Socket
- 205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177  
 Back Box Depth: 47mm Minimum Cable Size: 45A: 1 x 16mm<sup>2</sup>  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

**Ingot 45A Switches And Socket Outlets**

- 500 45A Ingot 1 Gang DP Switch
- 501 45A Ingot 1 Gang DP Switch With Neon
- 502 45A Ingot 2 Gang DP Switch
- 503 45A Ingot 2 Gang DP Switch With Neon
- 504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177  
 Back Box Depth: 47mm Minimum Cable Size: 45A: 1 x 16mm<sup>2</sup>  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel





520



522



523



660



722



723



100



060



061

**Ingot Fan Isolation Switch**

**520** 10A Ingot 3 Pole Fan Isolation Plate Switch  
This product is not modular

**Lockable Switches**

**660** 20A Double Pole Key Lockable Switch

**Ingot 20A Control Switches With Optional Flex Outlet**

**522** 20A Ingot DP Switch  
**523** 20A Ingot DP Switch With Neon

**Ingot 20A Control Switches Without Flex Outlet**

**722** 20A Ingot DP Switch  
**723** 20A Ingot DP Switch With Neon  
3 pole and 20A DP switches are non-modular

Standards: BS EN 60669 660: BS EN 60669-1 Back Box Depth: 35mm Minimum 660: 47mm Minimum  
Cable Size: 1 x 2.5mm<sup>2</sup> / 2 x 1.5mm<sup>2</sup> 20A: 1 x 10mm<sup>2</sup> / 4 x 2.5mm<sup>2</sup> 660: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

**Blank Plates**

**060** 1 Gang Blank Plate  
**061** 2 Gang Blank Plate

All blank plates supplied with black and white gaskets where applicable.

**Dual Voltage Shaver Socket**

**100** 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 100: BS EN 61558  
Back Box Depth: 100: 47mm min. Cable Size: 100: 2 x 1.5mm<sup>2</sup> / 1 x 2.5mm<sup>2</sup>  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

# TV, Telephone & Data Sockets

The following pages contain details of Define® products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.



RJ11 Outlet | UK Telephone Outlets  
Satellite Socket Outlets | Coaxial Sockets



115



120 / 125



121 / 126



156



157



158



159

**RJ11 Telephone Outlet**

115 Single RJ11 (Irish/US) Outlet

**Telephone Outlets**

- 120 Single Telephone Outlet - Master
- 121 Twin Telephone Outlet - Master
- 125 Single Telephone Outlet - Secondary
- 126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 25mm Minimum 115: 35mm Minimum Termination Type: IDC  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

**Satellite Outlets (Unshielded)**

- 156 Non-Isolated Single Satellite Outlet
- 157 Isolated Satellite & Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

**Non-Isolated Coaxial Outlets (Unshielded)**

- 065 Single Coaxial Outlet
- 066 Twin Coaxial Outlet

**Isolated Coaxial Outlets (Unshielded)**


- 158 Single Isolated Coaxial Outlet
- 159 Twin Isolated Coaxial Outlet

Back Box Depth: 25mm Minimum  
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*) \*Excluding gasket


Understanding the code:  
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



311

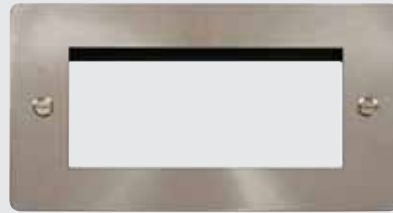

312



310



MM410BK MM405WH MM501BK MM440BK



See our dedicated New Media™ section for more information on the range of New Media™ modules available.

**Unfurnished Plates - New Media™**

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

All plates supplied with black and white gaskets where applicable. \*Excludes BN Finish

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Back Box Depth: Dependant on module used  
 Dimensions: 1 Gang: (88mm x 88mm x 1.3mm\*), 2 Gang: (146mm x 88mm x 1.3mm\*) \*Excluding gasket

Understanding the code:  
 FP - Plate Style BS - Plate Finish 310 - Product No.  
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



WA092



SP640



WA094



WA095



WA099



WA102

essentials™

For the complete range of back boxes see Essentials™ page m4.

**Galvanised Steel Back Boxes**

- WA092** 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098** 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099** 1 + 1 35mm Deep Dual Accessory Box
- WA102** 1 + 2 35mm Deep Dual Accessory Box

**Longer Fixing Screws**

- SP640BN** Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
- SP640CH** Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
- SP622** Define® M3.5 Security Screw 22mm Long (Bag 100)
- SP623** Standard M3.5 Security Screw 50mm Long (Bag 100)  
 SP622 and SP623 Require 2mm security allen key/driver.



WA106P



WA107P



GA100



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page m7.

**Dry Lining Boxes**

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

**FlameGuard® Dry Lining Boxes**

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box

**'Ezylink' Dry Lining Box Connector**

- GA100** 'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1363-1: 1999 & BS EN 1364-1: 1999 Acoustic: BS EN ISO 140-3: 1995 & BS EN ISO 717-1: 1997. Complies with Building Regulations  
Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.